

F-800 + P-800

Electric Punching & Electric Closing Machine 800 mm Width



PROFESSIONAL LINE

- With the widest binding length on the market, Line 800 can satisfy even the most unusual requirements, allowing top performances in highly profitable markets.
- Due to the exceptionally strong punching power it is possible to punch thick cardboard, high blocks of sheets and even aluminium (with proper lubrication).



F-800




PROFESSIONAL LINE

Electric Punching 800 mm Width

HOW IT WORKS

Punching with the F-800 is very easy: the operator simply has to insert the book to be bound under the carter and press the footswitch to punch.

PUNCHING PATTERN

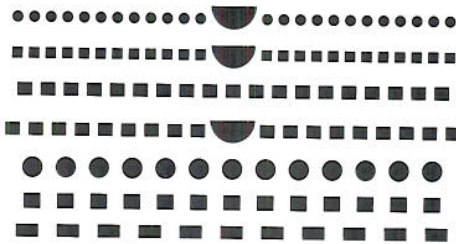

Punching tools.

FEATURES

- Maximum Punching length: 800 mm.
- Maximum Punching thickness depending on the length of the item to punch:
 - with 800 mm length = 2,5 mm
 - with 600 mm length = 4 mm
 - with 400 mm length = 5 mm.
- Distance from the punching edge adjustable from 2 mm up to 6 mm (depending on tool being used).
- Footswitch controlled.
- Accepts punching bars of 300 mm and 200 mm, singly, doubly or in combination with 200 mm thumb-cut punching bars, up to 800 mm maximum length, in the same pitch.
- Maximum output: up to 1000 punchings/hour, depending on materials used and skill of operator.
- Wide range of punching tools available, including tool for plastic-coils holes.

TECHNICAL SPECIFICATIONS

220/380 V 3-phase 50-60 Hz

H 1100 x D 800 x L 1200 mm

485 Kg

P-800




Electric Closing Machine 800 mm Width

HOW IT WORKS

Binding is an easy thing with the P-800: the operator only needs to insert manually the wire (and eventually the hanger) into the punched book, place it under the closing device and press the foot switch.

BINDING SYSTEM



Closing press.

FEATURES

- Maximum closing length: 800 mm.
- Footswitch controlled.
- Adjustable for closing any WireBind Rilematic® diameter.
- Maximum output: 1000 pcs depending on materials used and skill of operator.

TECHNICAL SPECIFICATIONS

220/380 V 3-Phase 50-60 Hz

H 1100 x D 800 x L 1200 mm

250 Kg

PITCH Steigung Pas	DIAMETER Durchmesser Diamètre	BINDING THICKNESS Bindestärke Epaisseur
3:1"	3/16"	4
	1/4"	5
	5/16"	6,5
	3/8"	8,5
	7/16"	10
2:1"	1/2"	11,5
	9/16"	12,5
	5/8"	14
	3/4"	17
	7/8"	20
	1"	23
	1" 1/4"	29

RILECART - WIREBIND INTERNATIONAL



Wirebind Division of Cartiere Paolo Pigna S.p.A.
 Headquarters: Via Daniele Presenti, 1 - 24022 Alzano Lombardo (BG) - Italy
 Factory: Via IV Novembre, 11 - 24022 Alzano Lombardo (BG) - Italy
 Tel.: +39.035.515.900 - Fax: +39.035.515.060
 E-mail: info@wirebind.com - Internet: www.rilecart.com

