




MTN/1100IW

Intrinsically safe industrial accelerometer Atex Group II approved.
Not to be mounted in a high velocity dust laden atmosphere

Applications

- Submersible Pumps
- Roll Monitors
- Paper machinery



Technical Specification

Standard Sensitivity	100 mV/g $\pm 10\%$ Nominal at 80 Hz
Frequency Response	2 Hz to 10 kHz $\pm 5\%$ (-3 dB at 0.8 Hz)
Mounted Base Resonance	18 kHz (nominal)
Isolation	Base isolated
Transverse Sensitivity	Less than 5%
Electrical Noise	0.1 mg max
Current Range	0.5 mA to 8 mA
Bias Voltage	12 Volts DC (nominal)
Operating Temperature Range	-25 to +90 °C
Case Material	Stainless steel
Cable Type	Integral Polyurethane Cable.

Warning ref Group II

This cable has additional hosing around it manufactured from PTFE plastic, which has a surface resistivity of greater than 1 Gohm and therefore poses a risk from electrostatic ignition. Care should be taken not to install the cable in a high velocity, dust laden atmosphere

Submersible Depth	100 metres maximum (10 bar)
Weight	150 gms (nominal)
Sealing	IP68
Mounting Torque	8Nm
Maximum Cable Length	See system drawing ATX028
Certificate Details: Group II	BAS02ATEX1057X E II 1GD T70°C EEx ia IIC T6 (-55°C \leq Ta \leq +65°C)

Warning ref Group II

The Ci and Li were previously lower. The installer must take account of the increase in internal capacitance and inductance present on this apparatus

System Connection	Drawing ATX028
Terminal Parameters	Ui = 28V, li = 93mA, Pi = 0.65W see certificate for Ci & Li
500V Isolation	Units will pass a 500V isolation test
Barrier	1 x MTL7728+ (BAS01ATEX7217) or P&F Z728 (BAS01ATEX7005) or any other barrier that conforms to note 5 of ATX028

Mounting and Sensitivity

ORDER CODE PART No	MOUNTING	xx =OPTIONAL SENSITIVITY RANGE AVAILABLE (+/- 10%)
MTN/1100IW-xx MTN/1100IWQ-xx	1/4" UNF FEMALE QUICK FIT FEMALE	10 mV/g 25 mV/g 30 mV/g 50 mV/g
FOR OTHER MOUNTINGS SEE BELOW.		


<h2>Options</h2>	Connector, Various cable lengths, Optional mounting, other sensitivities (see table).
------------------	---

Mounting Adapters and Studs

Studs and Grub Screws




Quick Fit Adapters



Male Studs		
Product Code	From	To
MS036	1/4" - 28 UNF	M6
MS039	1/4" - 28 UNF	10 - 32 UNF
MS067	1/4" - 28 UNF	M8
MS068	1/4" - 28 UNF	1/4" - 28 UNF
MS124	1/4" - 28 UNF	M10
MS132	1/4" - 28 UNF	M12

Quick Fit (Q/F)		
Product Code	From	To
MS001	Q/F Male	Glue Base
MS002	Q/F Male	M8 Male
MS003	Q/F Male	M10 Male
MS004	Q/F Male	1/4" - 28 UNF Male
MS006	Q/F Male	M6 Male


Other Adapters



Mounting Adapters		
Product Code	From	To
MS005	Q/F Male	1/4" - 28 UNF Female
MS007	Q/F Male	10 - 32 UNF Female
MS008	Q/F Male	M8 Female
MS011	1/4" - 28 UNF Male	Q/F Female
MS013	1/4" - 28 UNF Male	Glue Base
MS033	1/4" - 28 UNF Male	Q/F Female
MS038	Q/F Male	M8 Conical Male
MS061	1/4" - 28 UNF Male	10 - 32 UNF Male
MS079	1/4" - 28 UNF Male	Q/F Female
MS106	Q/F Male	M10 Female

Isolation		
Product Code	From	To
MS034	1/4" - 28 UNF Male	1/4" - 28 UNF Female
MS093	Q/F Male	M8 Male

Measuring System Connection

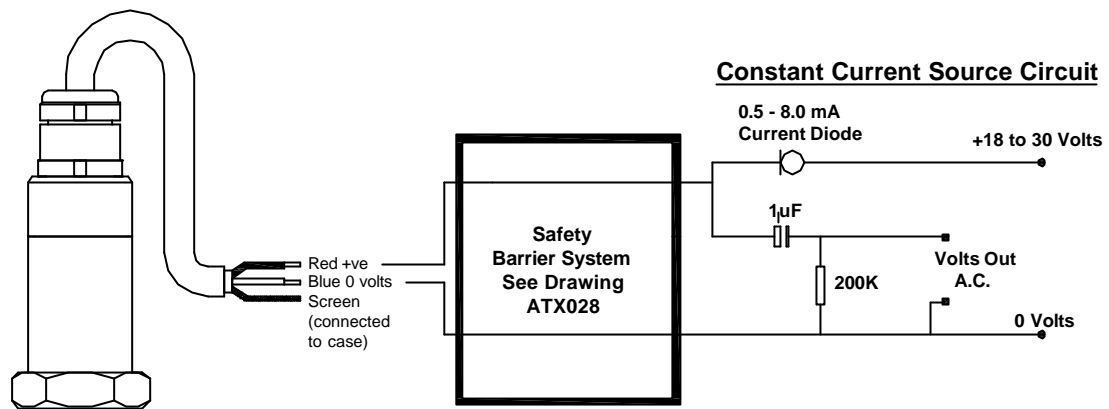

Barrier Enclosures		
Product Code	Type	Capacity
MTN/MH145	DX430	33 Barrier Capacity